




# Glas-Wrap™

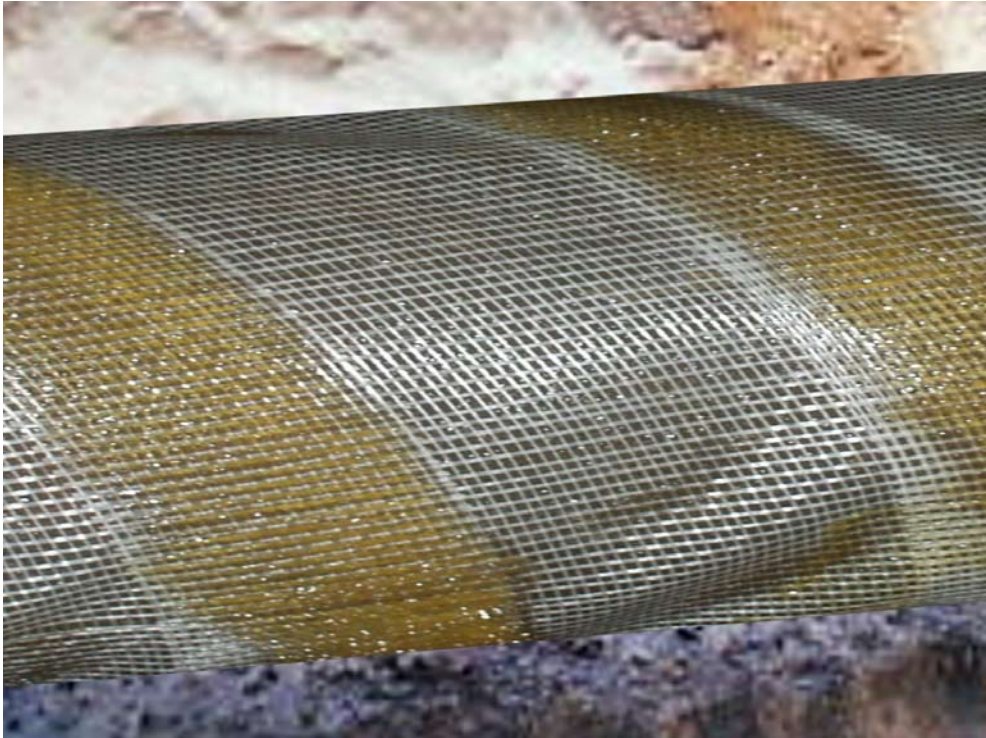

**Description:**

Glas-Wrap™ is a white, resin-coated, woven fiberglass fabric.

**End Use:**

Used as an overwrap for Trenton's #1 Wax-Tape® for additional protection against backfill and soil stress.

**Application Procedures:**

Wearing gloves, apply Glas-Wrap over the #1 Wax-Tape using a 1" overlap, rubbing firmly onto the Wax-Tape.

**Specifications:**

Tensile strength..... (per one inch width) 85 lb min.  
 Thread count per inch:  
     Wrap threads.... 20  
     Fill threads..... 10  
 Thickness..... .005 in.  
 Color..... White

**Packaging:**

4" x 150' rolls (18 per case)  
 6" x 150' rolls (12 per case)  
 12" x 150' rolls (6 per case)  
 100 sq. yds. per case, 13 lbs per case

**Quantity Requirements:**

Pipe Size	Tape Width	Sq. yds./100 ft. (1" overlap)
2"	4"	10
4"	4"	20
6"	4"	29
8"	4"	37
10"	6"	42
12"	6"	49
14"	6"	54
16"	6"	62
18"	6"	69
20"	6"	77
22"	6"	85
24"	6"	92



**Corporate Office:**  
7700 Jackson Road  
Ann Arbor, MI 48103 USA  
(734) 424-3600  
Fax: (734) 426-5882  
trenton@trentoncorp.com

**Export/Houston Office:**  
1880 S. Dairy Ashford Rd.  
Suite #697  
Houston, Texas 77077 USA  
(281) 556-1000  
Fax: (281) 556-1122  
tweber@trentoncorp.com

**European Office:**  
8, rue de Berri  
Paris, France 75008  
+33 (0) 1 42 99 95 78  
Fax: +33 (0) 1 42 99 95 79  
europe@trentoncorp.com

**[www.trentoncorp.com](http://www.trentoncorp.com)**